

BS-GTH 202K

Heavy duty welded steel fixed castor, heavy duty wheel, with Blickle Extrathane® polyurethane tread, with cast iron wheel centre

EAN 4047526267322

ID 267328

Customs tariff number 87169090



Bracket: BS series


- particularly robust welded steel construction
- zinc-plated, yellow-passivated, Cr6-free

Wheel: GTH series

- tread: high-quality polyurethane elastomer Blickle Extrathane®, hardness 92 ShoreA, colour yellow, non-marking, non-staining
- wheel centre: rugged grey cast iron
- with grease nipple, lacquered, colour silver

Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -20 °C to +70 °C, temporarily up to +90 °C, reduced load capacity over +40 °C

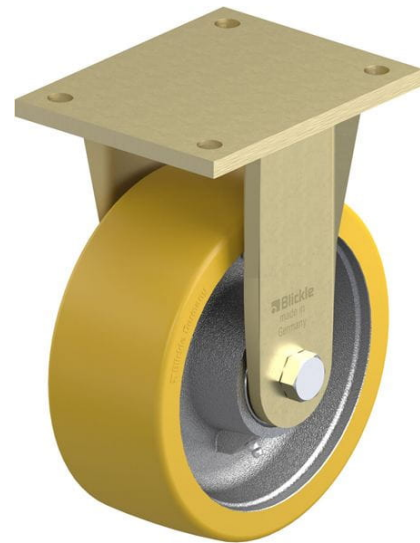

Technical data:

Wheel Ø(D)	200 mm
Wheel width	80 mm
Load capacity at 4 km/h	1,600 kg
Load capacity (static)	4,000 kg
Bearing type	ball bearing
Total height (H)	255 mm
Installation type	top plate
Platesize	175 x 140 mm
Bolt hole spacing	140 x 105 mm
Bolt hole Ø	14 mm
Temperature resistance min	-20 °C
Temperature resistance max	70 °C
Tread and tyre hardness	92 ShoreA
Unit weight	10.7 kg
Non-marking	✓
Non-staining	✓
Antistatic	✗
ESD	✗
Electrically conductive	✗
Corrosion-resistant	✗
Heat-resistant	✗
Treadhydrolysis-resistant	✗
Suitable for autoclaves	✗
Suitable for machine washing	✗

Tread and tyre hardness

■ ■ ■ ■ ■ □ 92 ShoreA

Rolling resistance

■ ■ ■ ■ ■ □ very good

Wear resistance

■ ■ ■ ■ ■ □ excellent

Operating noise / floor surface preservation

■ ■ ■ ■ □ □ good

