Dandenong Wheels & Castors

CASCOO Australia & New Zealand

PRODUCT DATA SHEET

N2U6-125-S

N2U6 S/STEEL SWIVEL CASTOR
96 x 80MM PLATE MOUNT
Ø125MM BALL BEARING WHEEL




SPECIFICATIONS

WHEEL

Wheel Diameter	125 mm
Tread Width	32 mm
Hub Width	52 mm
Axle Size	M8
Tread Material	Red TPU, 95 Shore A
Wheel Material	Grey Polyamide
Bearing	Stainless Steel Ball Bearing
Thread Guard	Small Plastic Thread Guard
Operating Range	-40°C to +80°C

FRAME

Mount Type	Plate
Mount Material Thickness	2.5 mm
Fork Material Thickness	2.0 mm
Mount Dimensions	80 / 72 x 60 / 52 mm
Axle Offset	37 mm
Overall Height	155 mm
Swivel Radius	*TBC*
Rated Capacity (4km/h)	200 kg
Complies With	DIN EN 12532

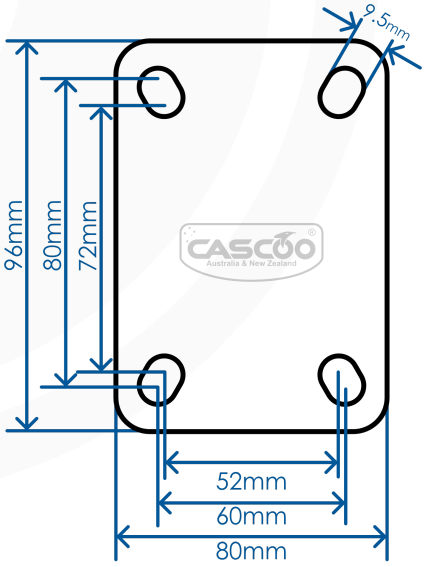


DANDENONG WHEELS & CASTORS
310 South Gippsland Highway, Dandenong South VIC 3175
(03) 9792 3949 | sales@dandenongcastors.com.au | www.dandenongcastors.com.au

Dandenong Wheels & Castors

CASCOO Australia & New Zealand

N2U6-125-S

N2U6 SERIES SWIVEL CASTOR, Ø125MM WHEEL

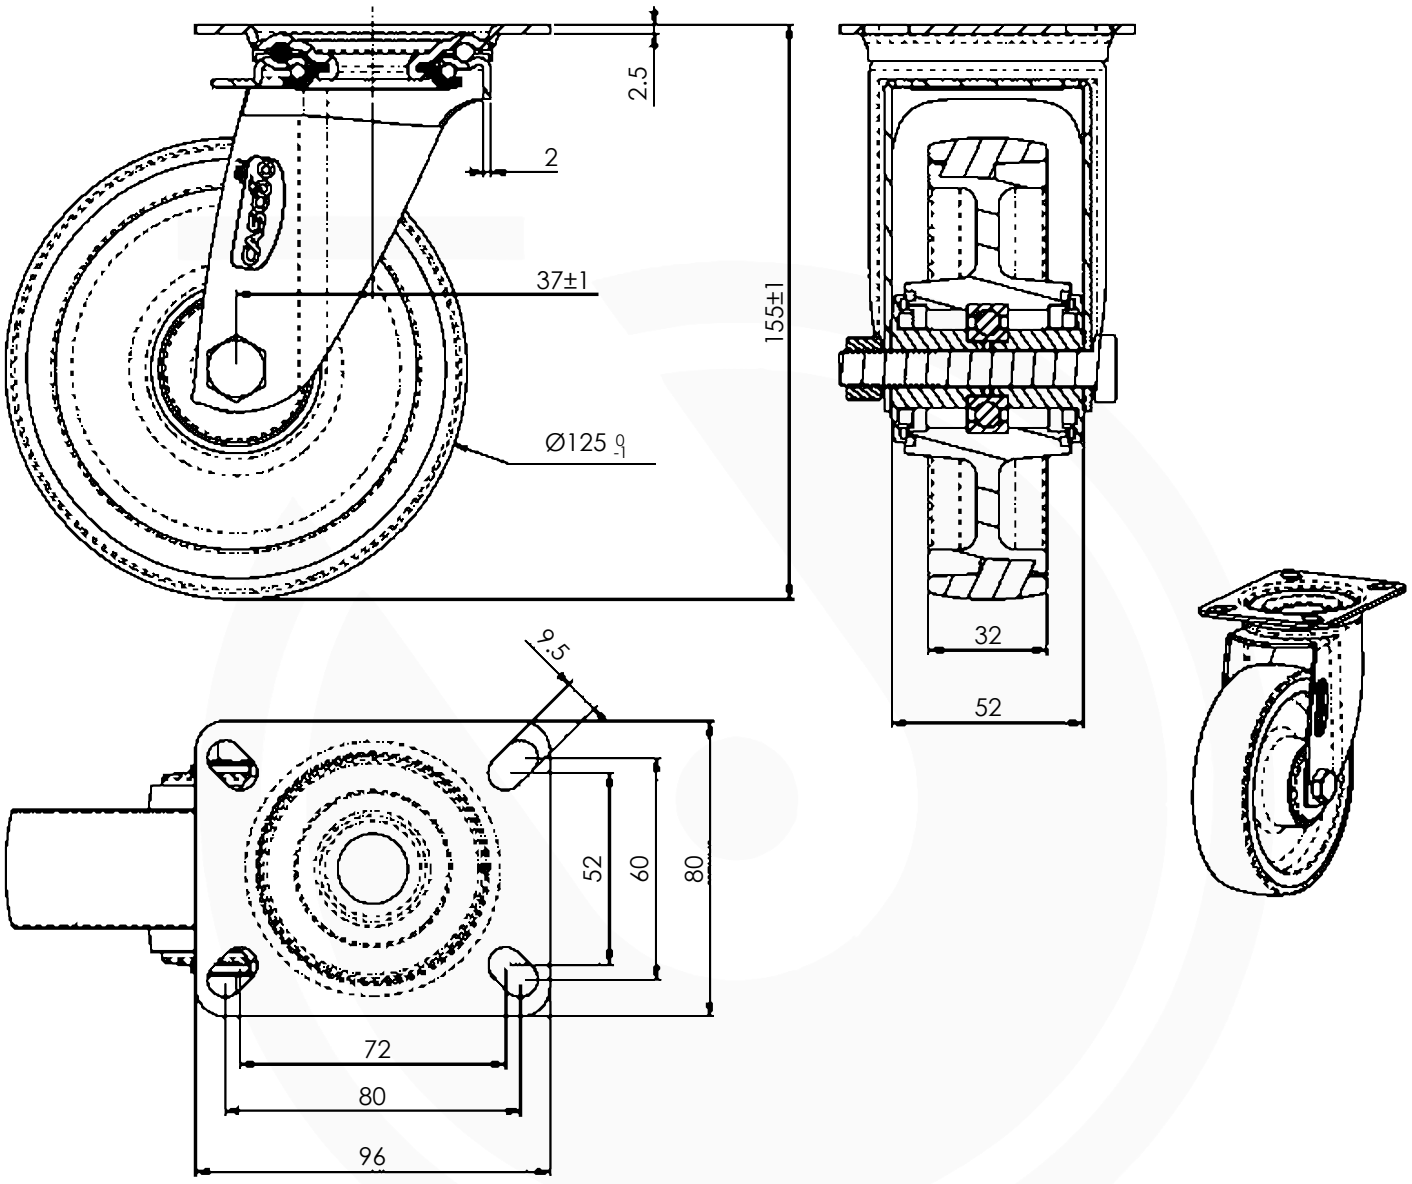

CASCOO Australia & New Zealand

STEP Files Available Online
Scan or click the QR code

DANDENONG WHEELS & CASTORS
310 South Gippsland Highway, Dandenong South VIC 3175
(03) 9792 3949 | sales@dandenongcastors.com.au | www.dandenongcastors.com.au