

O Stainless



Features

- 100% corrosive-free 304 grade stainless steel (SS) castors in plate or bolt hole configurations, with or without total brake or direction lock.
- Blue high resilience (hi-res) rubber, grey rubber, polyurethane (PU) or white nylon wheels.
- Chicago screw axle type 304.
- Fork and ball bearings type 304.
- Axle, bolt and nut type 304.
- Rivet and axle bush type 303.
- TB spring type 301 full hard.
- Reducing bush type 303.
- Option for regular nut and bolt or stainless steel Chicago screw.
- Made in Australia.

Wheels



HBS*¹

Blue hi-res rubber, SS roller bearing

HSS*¹

Grey rubber, SS roller bearing, optional thread guard

HUS*

PU, SS roller bearing

ONS...W*

White nylon, SS roller bearing

Wheel	Max load (kg)	Diameter x tread (mm)	Hub x bore (mm)	Bore—no bush (mm)
HBS150	230	150 x 28	60 x 12.7	20
HBS200	250	200 x 28	60 x 12.7	20
HSS200	250	200 x 50	60 x 12.7	20
HUS100	400	100 x 40	60 x 12.7	20
HUS125	400	125 x 40	60 x 12.7	20
HUS150	450	150 x 40	60 x 12.7	20
HUS200	500	200 x 48	60 x 12.7	20
ONS100W	400	100 x 40	60 x 12.7	20
ONS125W	400	125 x 40	60 x 12.7	20
ONS150W	450	150 x 40	60 x 12.7	20
ONS200W	500	200 x 40	60 x 12.7	20

* Wheels also available with plain bearings—HBA, HSA, HUA...S, ONA...WS.

¹ HBS, HSS wheels are not compatible with total brake fork.

Forks



OSP

Plate with swivel

OSPTB¹

Plate with swivel and total brake

OSPDL


Plate with swivel and direction lock

HSF

Fixed plate

Forks	Wheel size (mm)	Mount height (mm)	Turning radius (mm)
OSP/HSF ²	100	138	96
	125	162	109
	150	189	121
	200	239	152
OSPTB/OSPDL	100	138	140
	125	162	140
	150	189	140
	200	239	162

Fork mounts

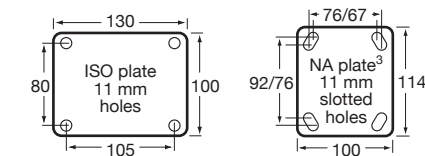

² HSF—fixed plate has no turning radius.

³ North American plate. Add **N** to the end of fork code to purchase (eg. HBS150/OSPNTB).

Order codes

Wheel	Fork code	Castor code
HBS150 Diameter: 150 mm	O150SP	HBS150/OSP
	H150SF	HBS150/HSF
	O150SPDL	HBS150/OSPDL
HBS200 Diameter: 200 mm	O200SP	HBS200/OSP
	H200SF	HBS200/HSF
	O200SPDL	HBS200/OSPDL
HSS200² Diameter: 200 mm	O200SP	HSS200/OSP
	H200SF	HSS200/HSF
	O200SPDL	HSS200/OSPDL
HUS100 Diameter: 100 mm	O100SP	HUS100/OSP
	H100SF	HUS100/HSF
	O100SPTB	HUS100/OSPTB
	O100SPDL	HUS100/OSPDL
HUS125 Diameter: 125 mm	O125SP	HUS125/OSP
	H125SF	HUS125/HSF
	O125SPTB	HUS125/OSPTB
	O125SPDL	HUS125/OSPDL
HUS150 Diameter: 150 mm	O150SP	HUS150/OSP
	H150SF	HUS150/HSF
	O150SPTB	HUS150/OSPTB
	O150SPDL	HUS150/OSPDL
HUS200 Diameter: 200 mm	O200SP	HUS200/OSP
	H200SF	HUS200/HSF
	O200SPTB	HUS200/OSPTB
	O200SPDL	HUS200/OSPDL

Wheel	Fork code	Castor code
ONS100W Diameter: 100 mm	O100SP	ONS100W/OSP
	H100SF	ONS100W/HSF
	O100SPTB	ONS100W/OSPTB
	O100SPDL	ONS100W/OSPDL
ONS125W Diameter: 125 mm	O125SP	ONS125W/OSP
	H125SF	ONS125W/HSF
	O125SPTB	ONS125W/OSPTB
	O125SPDL	ONS125W/OSPDL
ONS150W Diameter: 150 mm	O150SP	ONS150W/OSP
	H150SF	ONS150W/HSF
	O150SPTB	ONS150W/OSPTB
	O150SPDL	ONS150W/OSPDL
ONS200W Diameter: 200 mm	O200SP	ONS200W/OSP
	H200SF	ONS200W/HSF
	O200SPTB	ONS200W/OSPTB
	O200SPDL	ONS200W/OSPDL